

Stores the energy wasted by the elevator when motor brakes to return it in the next consumption trip. Energy savings up to 70% with no harmonic distortion and no added stand-by consumption with a simple two-wire connection to any drive.



ENERGY RECOVERY SYSTEM FOR LIFTS




- dule of ultracapacitors.
 » Very simple connection of ERS 2G to any VWF drive is enough to transform the elevator to a regenerative one with storage.
- » Only the connection to DC link of the drive is enough for the system to **automatica-Ily store** the energy in the supercapacitors when generated and return it when there is a consumption.
- » Supercapacitor modules offer better



_{bv} epic power

power density and cycling features than batteries. Therefore, they are the best possible solution **for fast charging and discharging applications** such as in elevators.


- » Ultracapacitors require no maintenance.
- » Simple integration both in new or existing elevators with no need for replacements.



» Recovers and stores the energy generated by the elevator to return it in

ADVANTAGES

- the next consumption trip or to support the drive's standby.» No regeneration to the grid. No har-
- monic problems.
- » Granting improvement of the **efficiency classification** of the lift.
- » Elevator actually consumes less energy from mains.
- » Very simple two-wire connection to any drive, new or existing.

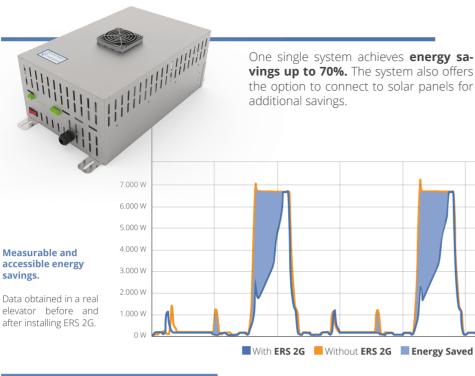

How is energy generated?

In electric traction elevators that include VWF drives, also known as inverters, the generated energy is wasted in the form of heat in a braking resistor.

ERS 2G is capable of storing this energy to return it to the same elevator thus reducing the consumption in the next trip or, if there is no immediate trip, supplying the standby energy of the drive until the energy stored is depleted.

In a typical elevator, the cabin is counterweighted. When the counterweight goes down, the cabin goes up and vice versa.

When the cabin goes down loaded, it weights more than the counterweight so the cabin goes down by effect of gravity and the elevaty motor acts as a brake, generating



happens when the cabin goes up unloaded; in that case the counterweight is heavier, gravity moves it down and the motor generates energy again in the same way a dynamo does.

The same thing

The new ERS 2G also includes an option

to connect solar panels. It revolutioni-

zes how an elevator consumes energy

because the elevator actually **demands less energy from mains**. This is not the

case with regenerative drives, with which

the elevator consumes the same and

then returns to the grid. Saved energy is

measurable and can be communicated

via CAN bus under request.

ti ss ee is by no r sv ee o

Technical features



energy

Available solutions for all types of loads and travel distances

	ERS 2G	ERS 2G x n (paralelizable)
Optimum for lifts	Up to 15 kW	Up to 15 kW x n
Stored energy	60000 Ws	60000 Ws x n
Nominal power	6300 W	6300 W x n
Efficiency	Up to 98%	
Standby	< 2 W	
Alled with the sun	Available with solar panel input	

ERS 2G



ABOUT ERS 2G

- » Easily transformation of any elevator into a **regenerative one**.
- » Up to 70% savings of the energy consumed by the motor.
- » Suitable for new or existing elevators.
- » Available also with solar panel connection in order to obtain better consumption results.
- » Improves energy classification of the lift.



ABOUT US

Designing, developing and manufacturing very efficient high power converters since 2009.

epic power is a key power electronics partner for energy efficiency and energy storage solutions:

- » Flexible systems
- » Customized designs
- » Experienced engineering support



Epic Power Converters, S.L. · CIF: B99349623 +34 976 24 95 80 · Zaragoza (Spain) www.epicpower.es · info@epicpower.es