

EPC Bidirectional DC/DC converters

isolated series



KEY FEATURES

- ❖ Wide voltage range
- ❖ Voltage and current control
- ❖ Soft start from 0 V
- ❖ High efficiency
- ❖ Galvanic isolation
- ❖ Power scalable. Paralleling.
- ❖ Protections (Overcurrent, overvoltage, overtemperature)
- ❖ CAN communication
- ❖ Custom design under request
- ❖ MPPT from PV

TYPICAL APPLICATIONS

- ❖ Power supply
- ❖ Smart grids
- ❖ Battery charger
- ❖ Energy storage systems
- ❖ Energy recovery
- ❖ Hydrogen generation
- ❖ Battery hybridation
- ❖ Solar panels - MPPT

The EPC is a family of bidirectional DC to DC power converters that can be used in a broad number of applications. They provide ultra-high efficiency in both directions with galvanic isolation. Standalone configuration with Soft-Start and wide voltage ranges allow fast and easy setup. Several converters can be connected in parallel in order to reach higher power. CAN communication can be used to implement voltage or current control and measures all the main relevant operation parameters.

ELECTRICAL SPECIFICATIONS

| Model | EPC 3k5 648i | EPC 5k5 648i | EPC 2k2 624i | EPC 2k2 348i | EPC 2k2 324i | EPC 4k8 6125i | EPC 7k 670i | EPC 8k 8380i |
|-----------------------------------|---|---|---|---|---|--|--|--|
| Peak power | 4.2 kW | 6.5 kW | 2.6 kW | 2.6 kW | 2.6 kW | 4.8 kW | 7.5 kW | 10 kW |
| Nominal power | 3.5 kW | 5.5 kW | 2.2 kW | 2.2 kW | 2.2 kW | 4.8 kW | 7.0 kW | 8.0 kW |
| High side voltage (Vdc) | 510 to 848 V | | | 280 to 450 V | | 430 to 830 V | 510 to 848 V | 650 to-848V |
| High side current (max) | 6 A (7.5 A) | 10 A (12 A) | 4 A (5 A) | 7 A (9.3 A) | 7 A (9.3 A) | 9 A | 11.6 A (12.5 A) | 11 A (16 A) |
| Low side voltage (Vdc) | 38 to 59 V (optional from 0 V) | | 19 to 30 V (optional from 0 V) | 38 to 59 V (optional from 0 V) | 19 to 30 V (optional from 0 V) | 110 to 165 V (optional from 0 V) | 40 to 88 V (optional from 0 V) | 280 to 600 V (optional from 0 V) |
| Low side current (max) | 75 A (115 A) | 115 A (180 A) | 92 A (130 A) | 50 A (70 A) | 92 A (130 A) | 45 A | 100 A (108 A) | 21 A (33 A) |
| Isolation | High to Low side: 2.5 kV High side to earth: 4 kV; Low side to earth: 1.5 kV (2.5 kV for EPC-4k8-6125) Low side to user signals: 3 kV (5 kV for EPC-4k8-6125) | | | | | | | |
| Max. efficiency | 98 % | | | | | | | |
| Stand-by | <3 W | | | | | | | |
| Control | Digital control self-powered from High or Low Side Voltage (Low Side prioritized) | | | | | | | |
| Digital control self-powered from | Low Side Voltage (optional version from Low and High side: EPC 3k5 648iHL) | Low Side Voltage (optional version from Low and High side: EPC 5k5 648iHL) | Low Voltage Side (optional version from Low and High side: EPC 2k2 624iHL) | Low Side Voltage (optional version from Low and High side: EPC 2k2 348iHL) | Low Side Voltage (optional version from Low and High side: EPC 2k2 324iHL) | Low Side Voltage (optional version from Low and High side: EPC 4k8 6125iHL) | Low Side Voltage (optional version from Low and High side: EPC 7k 670iHL) | High Side Voltage (optional version from Low and High side: EPC 8k 8380iHL) |

GENERAL SPECIFICATIONS

| Item | Description |
|------------------------|--|
| Operating temperature | -10 to 40 °C |
| Storage temperature | -10 to 70 °C |
| Cooling | Air cooled (Fans only ON when needed) |
| Communication protocol | CAN 2.0B: Bus speed typical 125kbps (min 125kbps, max 500kbps) Messages period: Default value: 250ms; Minimum value: 50m; Maximum value: 1000ms |
| MTBF | TELCORDIA SR-332, Issue 3: >350400 hours (PRELIMINARY) |
| Maintenance | No electrolytic capacitors in DC links (Long life FILM capacitors) Fan replacement >70000 h |

REGULATIONS

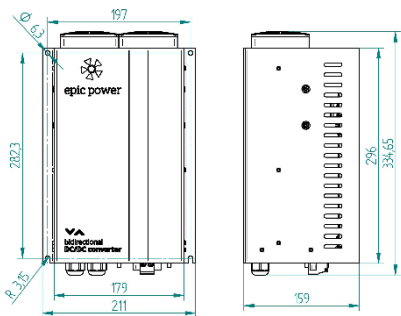
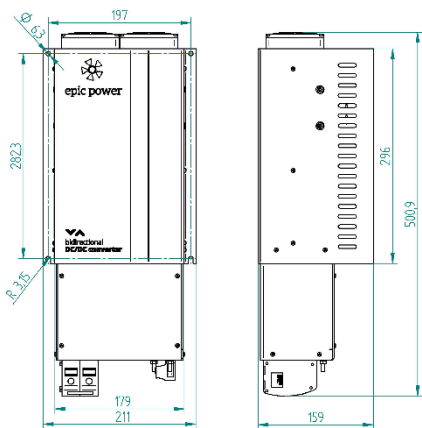
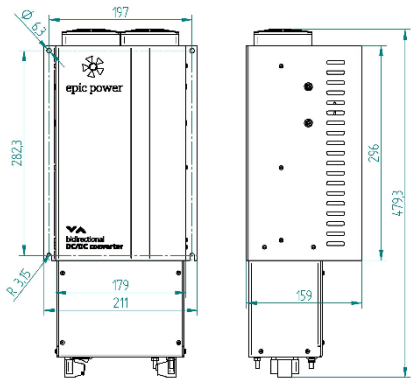
| Regulations | |
|--|--|
| UL 61800-5-1 | Standard for safety – Adjustable Speed Electrical Power Drive Systems – Part 5-1: Safety Requirements – Electrical, Thermal and Energy |
| UL 1741 | Standard for safety – Inverters, Converters, Controllers and Interconnection System Equipment for Use With Distributed Energy Resources |
| CSA 22.2 No. 107.1 | Power conversion equipment |
| Low Voltage Regulations (LVD): European directive 2014/35/UE | UNE-EN 62109-1:2010. Safety of power converters for use in photovoltaic power systems UNE-EN 62477-1:2012 + A11:2014, A1:2017, A12:2021. Safety requirements for power electronic converter systems and equipment |
| Electromagnetic Compatibility Regulations (EMC): European directive 2014/30/UE | UNE-EN 12015:2021. Electromagnetic compatibility - Product family standard for lifts, escalators and moving walks – Emission UNE-EN 12016:2014. Electromagnetic compatibility - Product family standard for lifts, escalators and moving walks – Immunity EN 61000-6-2:2019. Electromagnetic compatibility (EMC). Generic standards. Immunity standard for industrial environments EN 61000-6-4:2019. Electromagnetic compatibility (EMC). Generic standards. Emission standard for industrial environments EN 61204-3:2018. Low-voltage switch mode power supplies. Electromagnetic compatibility (EMC) |
| Restriction of hazardous substances: European directive 2011/65/UE | UNE-EN 50581:2012. Technical documentation for the assessment of electrical and electronic products with respect to the restriction of hazardous substances° |

MECHANICAL SPECIFICATIONS

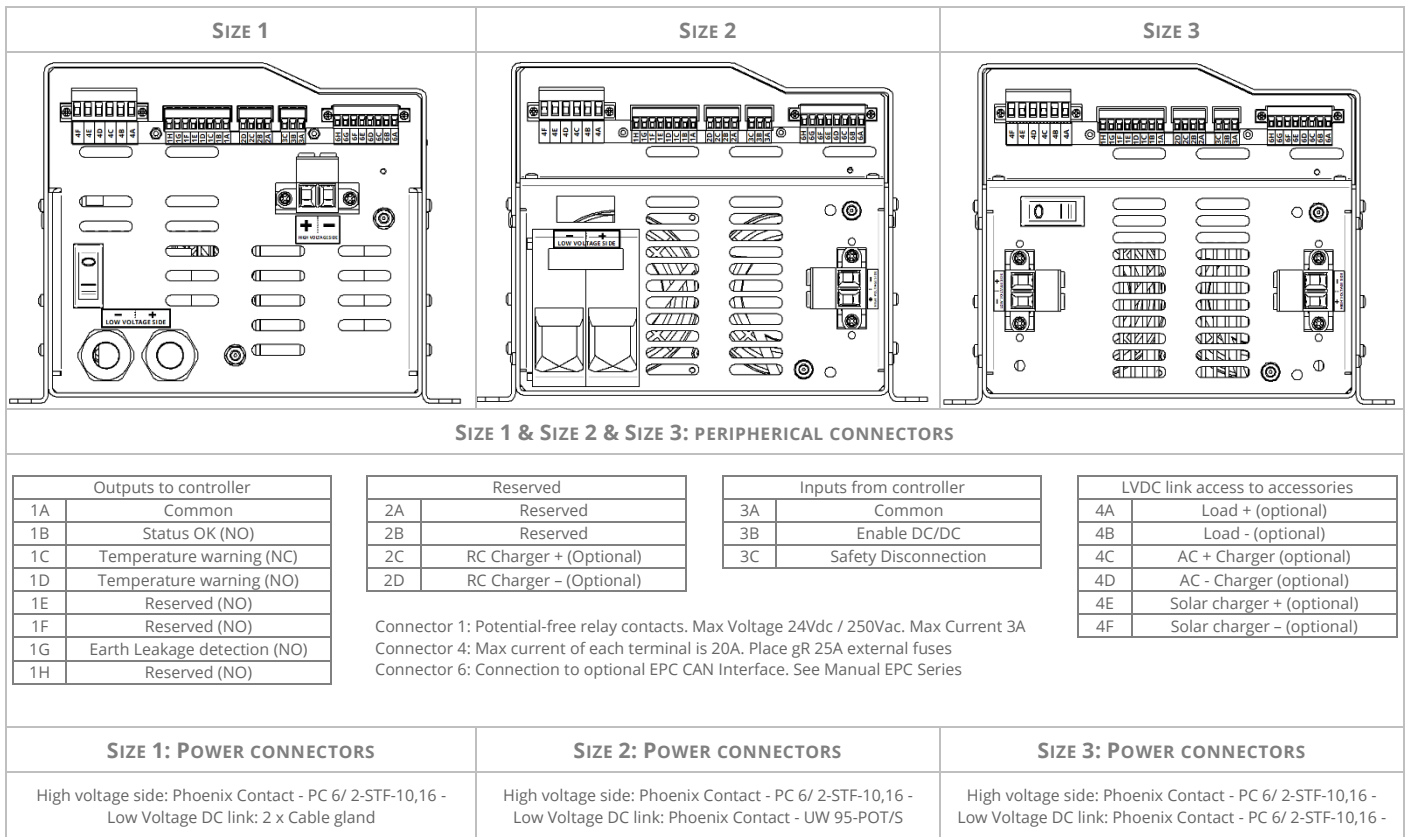
| Model | EPC 3k5 648i | EPC 5k5 648i | EPC 2k2 624i | EPC 2k2 348i | EPC 2k2 324i | EPC 4k8 6125i | EPC 7k 670i | EPC 8k 8380i |
|-----------|--------------|--------------|--------------|--------------|--------------|---------------|-------------|--------------|
| Size | Size 1* | Size 2* | Size 1* | Size 1* | Size 1* | Size 1* | Size 2* | Size 3* |
| Weight | 6.05 kg | 8.95 kg | 6.15 kg | 6.00 kg | 6.05 kg | 6.70 kg | 7.95 kg | 8,90 kg |
| Enclosure | IP 20 | | | | | | | |

*. See mechanical dimensions

MECHANICAL DIMENSIONS

| SIZE 1 | SIZE 2 | SIZE 3 |
|---|--|---|
|  |  |  |
| SIZE 1 | SIZE 2 | SIZE 3 |

ELECTRICAL CONNECTIONS



CONTROL MODES

Depending on the application, several kinds of controls are available.

AUTONOMOUS MODE (AMode)

The EPC feed the load within a voltage range with a sophisticated control loop that is able to supply or regenerate energy when needed with no added communications. In this mode, voltage is regulated in the HVDC if LVDC is within the usable voltage range. This mode is used to supply standard motor drives or inverters. Via CAN communication configuration is available.

CURRENT CONTROLLED MODE (CCMode)

An external controller would set the current reference for the HVDC side. Positive current is defined as charging current. Negative current is defined as discharging current. In order to avoid errors during charging and discharging processes, there is another signal that sets the current direction.

HIGH SIDE VOLTAGE CONTROLLED MODE (HSVCMODE)

In this mode, the external controller will set the voltage reference for the High Voltage DC side (HVDC side). Power and current limits can be configured

LOW SIDE VOLTAGE CONTROLLED MODE (LSVCMODE)

In this mode, the external controller will set the voltage reference for the Low Voltage DC side (LVDC side). Power and current limits can be configured

HIGH SIDE PHOTOVOLTAIC MODE (HSPVMODE)

In this mode, the EPC converter performs MPPT tracking algorithm in the HVDC side. This mode is used when solar panels are connected to the HVDC side. The external controller is able set the voltage reference for the LVDC side. Also current or power limits can be configured. This mode is not available for full range of EPC series.

LOW SIDE PHOTOVOLTAIC MODE (LSPVMODE)

In this mode, the EPC converter performs MPPT tracking algorithm in the LVDC side. This mode is used when solar panels are connected to the LVDC side. The external controller is able set the voltage reference for the HVDC side. Also current or power limits can be configured. This mode is not available for full range of EPC series.

| AUTONOMOUS MODE | | |
|------------------------|--|--------------------------------|
| Parameter | Description | Default value: EPC-3k5-648i |
| Mode | Change between Autonomous Mode and Current Controlled Mode | Autonomous Mode |
| Power direction | Configure the power flow: 1) Bidirectional 2) Charging direction 3) Discharging direction | Bidirectional |
| Charge ON voltage | Target voltage when the load connected to EPC generates energy | 655 V |
| Discharge ON voltage | Target voltage when the load connected to EPC consumes energy | 600 V |
| Max. charge current | Maximum allowable HVDC current in charging direction | 6 A |
| Max. discharge current | Maximum allowable HVDC current in discharging direction | 7.5 A |

*Note: For more info please refer to EPC Installation Guide

Example of defaults values of the EPC 3k5 648i

| CURRENT CONTROL MODE | | |
|----------------------|--|--------------------------------|
| Parameter | Description | Default value: EPC-3k5-648i |
| Mode | Change between Autonomous Mode and Current Controlled Mode | Autonomous Mode |
| Power direction | Configure the power flow: 1) Bidirectional 2) Charging direction 3) Discharging direction | Bidirectional |
| HVDC max voltage | Maximum allowable HVDC voltage | 800 V |
| HVDC min voltage | Minimum allowable HVDC voltage | 510 V |
| LVDC max voltage | Maximum allowable HVDC voltage | 59.2 V |
| LVDC min voltage | Minimum allowable HVDC voltage | 42.0 V |
| Max. charge current | Maximum allowable HVDC current in charging direction | 6 A |